ATLAS

Everlasting Endurance

RADIAL TRUCK TYRES

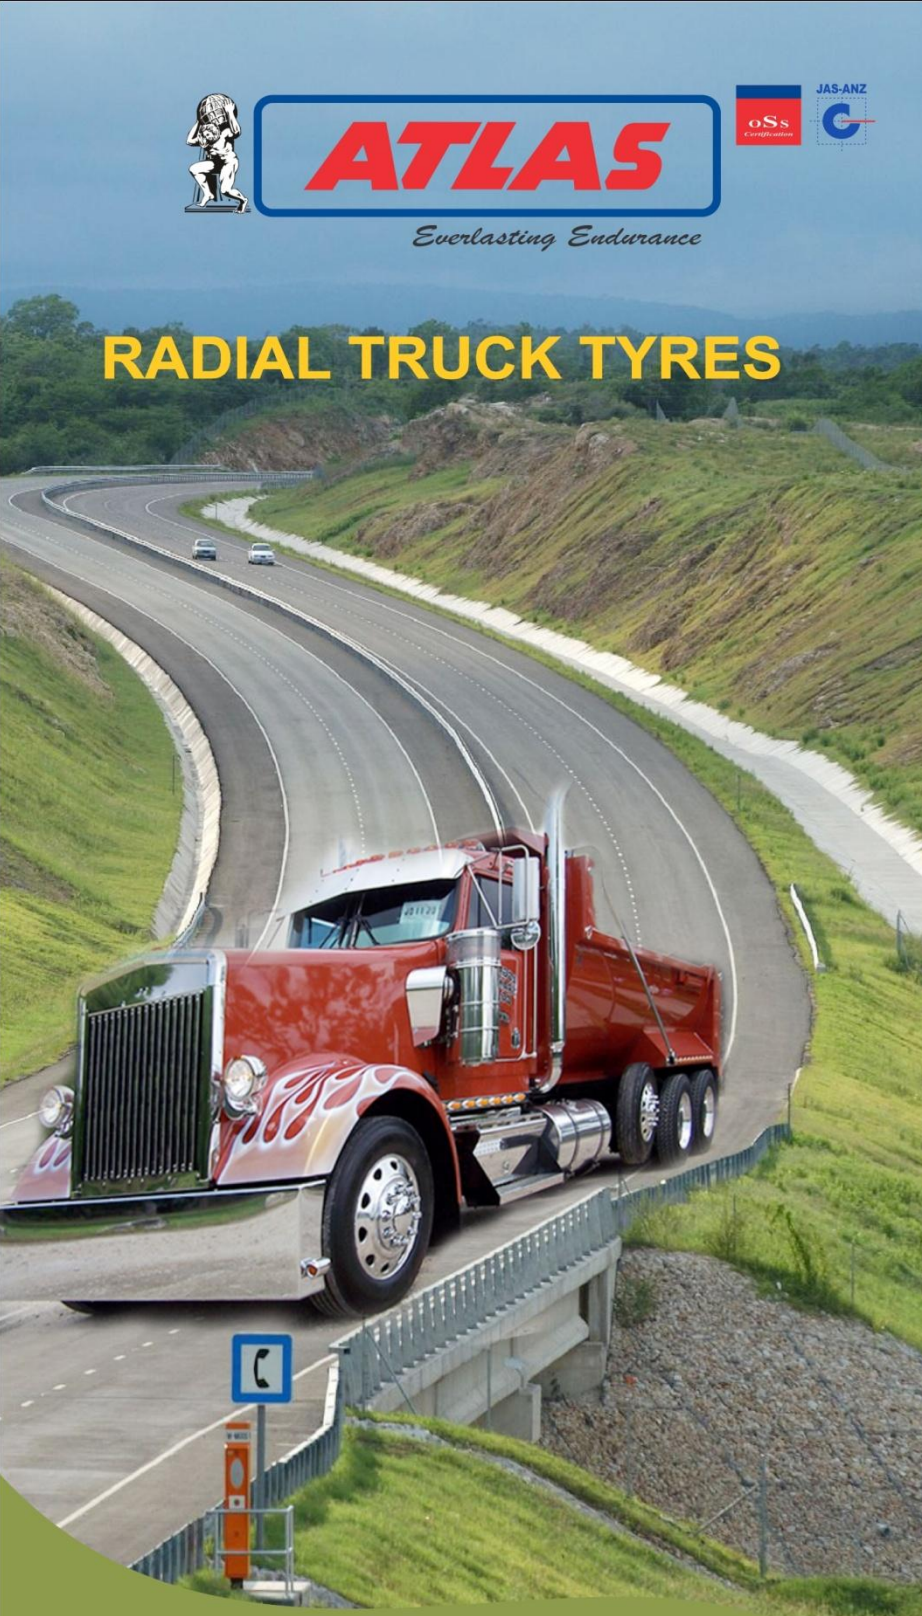

salsons Impex Pvt. Ltd.

(An ISO 9001:2008 Certified Company)

An Enterprise of the *ATLAS* Group

SAT 222

Features :

Driving, braking superior abrasion resistance , good load capacity. Suitable for general pavement road, mixed road surface, the short distance use, apply to drag wheels and driving wheels.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
295/80R22.5	18	20.0	9.00	152/149M	1050	298	3550/3150	850
315/80R22.5	18	20.0	9.00	154/149M	1082	312	3750/3450	830
315/80R22.5	20	20.0	9.00	157/153L	1082	312	3750/3450	830

SAT 223

Features :

Powerful driving force, Anti peeling performance, Low heat build up. Suitable for general pavement road, mixed road surface, the short distance use, apply to drag wheels and driving wheels.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11R22.5	16	22.0	8.25	146/143M	1048	268	3000/2725	830
12R22.5	16	21.0	9.00	152/149M	1081.5	289	3550/3275	930
295/80R22.5	16	22.0	9.00	152/149M	1046	291	3550/3250	900

SAT 298

Features :

Excellent heat dissipation performance, Great durability, Good load capacity, best traction, suitable for highway, city road and common way.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
7.50R16	14	12.0	6.00	122/118K	805	215	1500/1320	770
8.25R16	16	12.5	6.50	128/124M	856	235	1800/1600	770
12.00R24	20	17.0	8.50	160/157K	1118	310	4000/3850	900
10.00R20	16	15.5	7.50	149/146K	1044	276	3000/2725	830
10.00R20	18	15.5	7.50	149/146K	1044	276	3250/3000	930

SAT 305

Features :

Excellent anti-irregular wear performance & high mileage, Low resistance to rolling, Lower noise emission, Excellent heat radiation & guiding stability.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11R22.5	16	15.5	8.25	149/146K	1048	268	3000/2725	830
315/80R22.5	18	17.0	9.00	154/151M	1089	288	3550/3250	930

SAT 336

Features :

High wear resistance, bead design meets the requirement of being superior and strengthened , best traction, suitable for highway, city road and common way.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11.00R20	16	18.0	8.00	152/149K	1085	288	3350/3075	830
11.00R20	18	18.0	8.00	152/149K	1085	288	3550/3250	930
12.00R20	18	16.0	8.50	154/151K	1118	310	3750/3450	830

SAT 555

Features :

A high speed stability and performance, the ultra wearable , good load capacity, good paved road and mixed road, the long distance vehicles, apply to drag wheels, guide wheels and driving wheels does not apply.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
385/65R22.5	20	15.5	11.75	160K	1072	389	4500	900

SAT 660

Features :

Tire structure with super structure, with excellent carrying capacity, ultra- wear and anti-stab bundles tread formula for poor road conditions of roads, dedicated to, the short distance use.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
9.00R20	16	15.5	7.00	144/142K	1018	260	2800/2650	900
10.00R20	18	19.0	7.50	149/146K	1054	278	3250/3000	930
11.00R20	18	20.0	8.00	152/149K	1089	288	3550/3250	930
12.00R20	18	21.0	8.50	154/151K	1125	315	3750/3450	830

SAT 666

Features :

Drive, braking superior tear resistance, cutting, superior load capacity, short haul vehicles on our roads are not pavement use (mining, mountain site etc.)

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11.00R20	18	21.0	8.00	152/149K	1096	293	3550/3250	930
12.00R20	18	16.0	8.50	154/151K	1118	310	3750/3450	830

SAT 718

Features :

Low heat build up, even wear resistance, bead design meets the requirement of being superior and strengthened, best traction, suitable for highway, city road and common way.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
7.50-16	14	12.0	6.00	122/118K	805	215	1500/1320	770
8.25R16	16	12.5	6.50	128/124M	856	235	1800/1600	770
9.00R20	16	15.5	7.00	144/142K	1018	260	2800/2650	900
10.00R20	16	16.5	7.50	149/146K	1049	276	3000/2725	830
10.00R20	18	16.5	7.50	149/146K	1049	276	3250/3000	930
11.00R20	16	17.0	8.00	152/149K	1083	288	3350/3075	830
11.00R20	18	17.0	8.00	152/149K	1083	288	3550/3250	930
12.00R20	18	16.0	8.50	154/151K	1118	310	3750/3450	830
12.00R24	20	16.0	8.50	160/157K	1118	310	4000/3650	900
12R22.5	16	15.5	9.00	152/149M	1081.5	289	3350/3075	830
13R22.5	18	16.0	9.75	154/151L	1124	320	3750/3350	850
315/80R22.5	18	16.0	9.00	154/151M	1054	278	3250/3000	930

SAT 719

Features :

Execellent belt structure provides high wear resistance and low heating. Also, provides strong adhesion and anti slip performance, beed design meets the requirement of being superior and strengthened, designed for special use conditions, radial construction of carcass makes it comfortable ride.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
10.00R20	16	19.0	7.50	149/146K	1054	278	3000/2725	830
10.00R20	18	19.0	7.50	149/146K	1054	278	3250/3000	930
11.00R20	16	20.0	8.00	152/149K	1089	288	3350/3075	830
11.00R20	18	20.0	8.00	152/149K	1089	288	3550/3250	930
12.00R20	18	16.0	8.50	154/151K	1118	310	3750/3450	830

SAT 760

Features :

Suitable for all Wheels of bus & city road, Excellent traction & draining profile with higher fuel mileage. Low noise emission.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11R22.5	16	15.5	8.25	149/146K	1048	268	3000/2725	830
12R22.5	16	15.5	9.00	152/149M	1081.5	289	3350/3075	830
295/80R22.5	16	22.0	9.00	152/149M	1046	291	3550/3250	900
315/80R22.5	18	17.0	9.00	154/151M	1089	288	3550/3250	930
11R24.5	16	15.0	8.25	149/146L	1130	279	3250/3000	830

SAT 768

Features :

Great stability at high speed, bead design meets the requirement of being superior and strengthened, best traction suitable for highway, city road and common way.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11R22.5	16	15.5	8.25	149/146K	1048	268	3000/2725	830
12R22.5	16	15.5	9.00	152/149M	1081.5	289	3350/3075	830
12R22.5	18	15.5	9.00	152/149M	1081.5	289	3550/3275	930
295/80R22.5	18	15.5	9.00	152/149M	1046	291	3550/3250	900
315/80R22.5	18	17.0	9.00	154/151M	1089	288	3550/3250	930
315/80R22.5	20	17.0	9.00	157/149L	1089	288	3550/3250	930

SAT 778

Features :

Excellent load bearing capacity, Better mileage and excellent durability. Best traction, suitable for highway, city road and common way.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
9.00R20	14	15.0	7.00	142/142K	1015	260	2575/2430	790
9.00R20	16	15.0	7.00	142/142K	1015	288	2800/2650	900
10.00R20	16	15.5	7.50	149/146K	1044	276	3000/2725	830
10.00R20	18	15.5	7.50	149/146K	1044	276	3250/3000	930
11.00R20	16	16.5	8.00	152/149K	1079	288	3350/3075	830
11.00R20	18	16.5	8.00	152/149K	1079	288	3550/3250	930
12.00R20	18	16.0	8.50	154/151K	1118	310	3750/3450	830
12.00R24	20	16.0	8.50	160/157K	1118	310	4000/3650	900
11R22.5	16	15.5	8.25	149/146K	1048	268	3000/2725	830
12R22.5	16	15.5	9.00	152/149M	1081.5	289	3350/3075	830
315/80R22.5	18	17.0	9.00	154/151M	1089	288	3550/3250	930

SAT 799

Features :

Drive, braking, superior abrasion resistance, tear resistance, good load capacity, general pavement road, mixed surface, in the short- distance use of.



Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11.00R20	18	17.0	8.00	152/149K	1085	293	3550/3250	930
12R22.5	18	15.5	9.00	152/149M	1081.5	289	3550/3275	930

SAT 678



Features :

Tire structure with super structure , with execellent carrying capacity, ultra-wear and anti-stab bundles tread formula for poor road conditions of roads, dedicated to, the short distance use.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
12.00R24	20	17.0	8.50	160/157K	1118	310	4000/3850	900

SAT 696

Features :

Low head built up, good tear resistance tread, All weather pattern design, Excellent driving ability. Good braking & ground grasping capability.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	Overall Dia (mm)	Section Width (mm)	Load(kg)	Pressure (kpa)
11R24.5	16	15.0	8.25	149/146L	1130	279	3250/3000	830
12R22.5	16	15.5	9.00	152/149M	1081.5	289	3350/3075	830

About Us

The brand SALSONS is associated with the promoters of the ATLAS Group, one of the leading & distinguished business house in india for over 55 years and pioneers of the bicycle industry in the country. Company under the flagship of ATLAS manufacture automotive tyres and tubes for all the markets & exporting to over 85 countries across the globe including Asian, Gulf, African, Latin American and European markets. Currently, Our Group's turnover is in excess of USD 150 million. SALSONS's Auto Tyres Division boasts of a comprehensive range for all categories of tyres in various sizes and patterns to serve and fulfill the needs of all our esteemed clients.

Quality and Certification

SALSONS is equipped with a state-of-the-art production facility which helps us to develop & manufacture superior quality automotive Tyres. The Tyres are manufactures under strict quality compliances of the European and US standards such as ECE, ISO, DOT and CCC.

salsons Impex Pvt. Ltd.

(An ISO 9001:2008 Certified Company)

Suite 5B, Uppals Plaza M-6, 5th Floor, Jasola District Center

New Delhi-110025, India

Tel.: +91-11-40563451-55, Fax: +91-11-40563450

Email: info@salsonstyres.com, info@salsonsautomotivetyres.com

Website : www.salsonsautomotivetyres.com, www.salsonstyres.com